



Mamba 16L

Technical specification

Outdoor light with incorporated electronic gear for LED. High quality glass lenses 140 dgr beam spread. Lamp housing of die-cast aluminum for optimal stability and low weight. NL Power electronic LED gear integrated in fixture aluminum housing for optimal LED life, light flow and color performance. No need for tools when changing the light source and gear. Adjustable bracket for 60mm light poles.

Model and colors Available in grey.

Accessories On request, elumdat files of the different lenses are provided.



Area of use Typical road applications.

Technical data

Mains (input) voltage	220-240 V
LED driver output	Constant voltage 28V, Max 60W
Total weight	5,2 kg
Form of protection	IP 66, class I
Color temperature	4 000 K
Light source	LED
Operating position	85dgr + 95dgr
Control gear	Electronic
Start time	Instant
Driver	Built in
Safety glass	Included
Optics	30x140, 35x152



Art no	Description	Color
145-503-30	MAMBA LED 16L 30x140dgr	Grey
145-502-30	MAMBA LED 16L 35x152dgr	
070-69	Adapter for 40mm poles	Alu

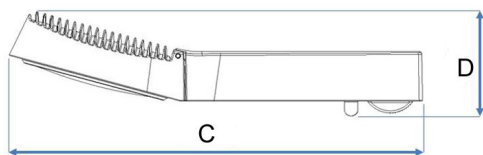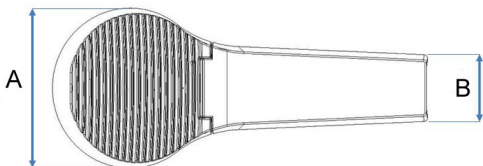

A 250 B 105 C 582 D 147 (mm)

Type	Delivered lumen output (lm)	System power (W)	EEI ³
740	2600	38,5	A

Note

Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.