




Spot			Medium			Flood		
14°			25°			33°		
m	ø	lux	m	ø	lux	m	ø	lux
1.0	0.24	11201	1.0	0.37	6550	1.0	0.55	2802
2.0	0.48	2800	2.0	0.75	1638	2.0	1.10	700
3.0	0.73	1245	3.0	1.12	728	3.0	1.65	311

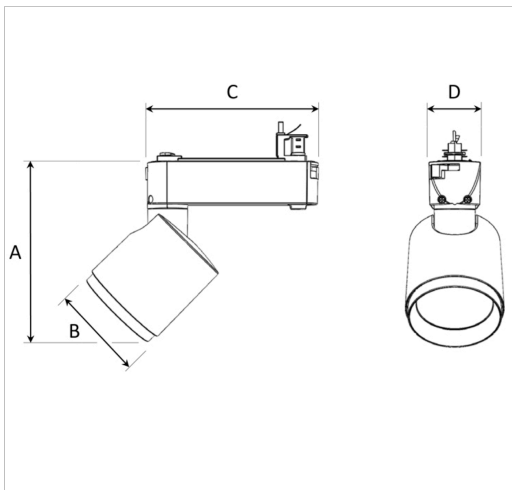

A 175 B 90 C 167 D 49 (mm)

Revoc mini COB 1500

Technical specification

LED Track light with incorporated electronic gear and Chip on board.

Improved color rendering index +90. High quality lenses with three different beam spreads.

Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight.

Model and colors Available in white, black and grey.

Area of use Track light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	0,76 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Color rendering index (CRI)	90
Light source	LED
Operating position	360°/90°
Start time	Instant
Driver	Electronic, built in
Optics	PMMA
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
268-504-10	Spot	White
268-504-20	Spot	Black
268-504-30	Spot	Grey
268-505-10	Medium	White
268-505-20	Medium	Black
268-505-30	Medium	Grey
268-506-10	Flood	White
268-506-20	Flood	Black
268-506-30	Flood	Grey
235-315-001	Anti dazzle shade	Black
235-204-001-10	Flaps kit	White
235-204-001-20	Flaps kit	Black
235-204-001-30	Flaps kit	Grey

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	1400	13	A+
930	1300	14	A
840	1350	11	A++
940	1300	13	A+

Note

Product available in other Kelvin temperatures by request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

Product is preliminary and still under construction. Please ask Nordic Light for latest update.